


The leak alarm controller is specifically designed to monitor the leakage of fuel and water in the interlayer of double-wall tanks and double-wall pipelines, also have sound-light alarm function.

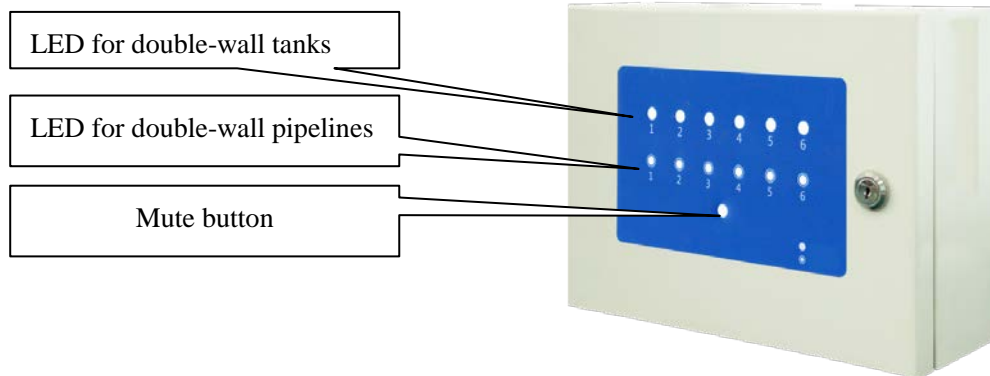

➤ Features :

- Compact structure and artistic appearance.
- Easy to install and maintain.
- Explosion-proof design, safe and reliable.
- Can connect with 6 double-wall tank leak sensors and 6 double-wall pipeline leak sensors.
- Can connect with switch volume leak sensor or RS485 type leak sensor.
- Can identify fuel and water, then give corresponding alarm.
- Communication failure alarm function.
- Leak sensor fault alarm function.
- LED alarm prompt function.
- With mute button, can eliminate sound alarm when alarm occurs but do not affect light alarm.

➤ **Technical Parameters :**

- Power supply: AC220V, +10%, -15%
- Working temperature: -20°C~+60°C
- Relative humidity: 30%~90%
- Operating current: <35mA
- Response time: <2S
- Alarm mode: sound and light alarm
- Explosion-proof mark: [Exia Ga] II B
- Overall dimension: 280 x 210 x 100 mm
- Weight: Approx. 2.7 Kg

➤ **NOTES WHEN ORDERING:**

- Specify its model.
- Specify supply voltage.
- Other useful details or contact us.

TOTAL MEASUREMENT SOLUTIONS PROVIDER
Member of Singapore Manufacturing Federation(Since1932)



Distributed by:

GROWCO INTERNATIONAL

International Business Office :

271 Bukit Timah Road, #03-04 Balmoral Plaza, Singapore 259708

Tel : (65) 6842 1170

Fax : (65) 6842 1182

Email: sales@growco.biz

Web: www.growco.biz

Growco International reserves the rights, without notice, to alter or improve the designs or specifications of the products described herein.

Origin of Singapore.